

# BVF 150mm (6") Range




- Quiet and efficient, the 150mm (6") series has an impressive extract rate of 230m<sup>3</sup>/hr, 64 litres per second, and is available various options.
- The units are all manufactured using high ABS thermoplastics for strength and durability, aesthetics and easy cleaning.
- Power is provided by a single phase induction motor with pre-oiled bearings for a long, maintenance-free life.
- IP Rating of IP44 which is equal to IPX4

## Technical Details

**Cat. No.**            **Product Type**  
**150mm (6") Wall/Ceiling Fans**

<b>BVF150S</b>	Standard extractor fan
<b>BVF150P</b>	As above supplied with pullcord switch
<b>BVF150T</b>	Timer model incorporating integral adjustable electronic timer (1-20mins)
<b>BVF150H</b>	Humidity control which is adjustable between 40% RH and 95% RH Complete with integral adjustable timer (1-20mins)
<b>BVF150HP</b>	As above with pullcord override switch. Requires no switched live

## Performance Graph 230m<sup>3</sup>/hr, 64 l/s

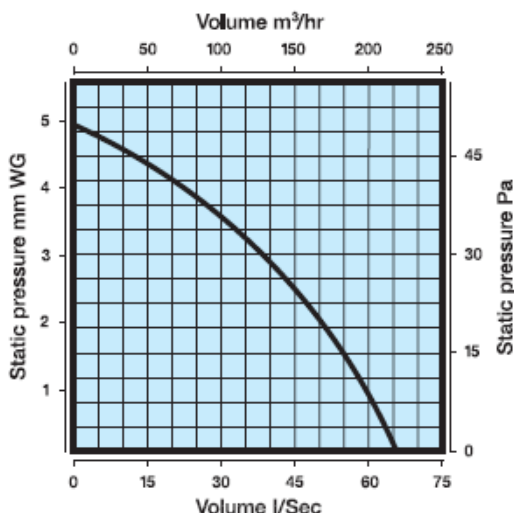

## Electrical

220-240V – AC. 50Hz  Single phase consuming 25 watts. There fans are double insulated and do not require an earth. All wiring must comply with current IEE regulations. A double pole isolating switch, having a contact separation of at least 3mm in all poles, must be used with a 3 amp fuse fitted. The fan must not be accessible to a person using either the shower or bath and mounted a minimum of 1.8 metres from the floor.

## Additional Data

### 150mm (6") Range

- Maximum pressure: 20 p.a.
- Fan speed: 2400 r.p.m.
- Sound Volume: 40.0 dB(A)
- Maximum Operating Temperature: 40°C

