

EMERGENCY CONVERSION PACK



LITHIUM

COMBINED LiFePO₄ BATTERY AND EMERGENCY MODULE

7
SEVEN YEAR WARRANTY

Our plug and play emergency solution

RECESSED EMERGENCY CONVERSION PACK FOR PANELS & DOWNLIGHTS


Any of our panels and downlights can be converted to emergency maintained 3-hours with these plug and play conversion kits.



No need to calculate in advance how many emergency fittings you will need, just keep a few of our emergency conversion packs handy to convert panels and downlights as you need them.

Each conversion pack includes:

- Emergency module unit with built-in lithium battery
- Indicator LED
- Plug and play cables & connectors

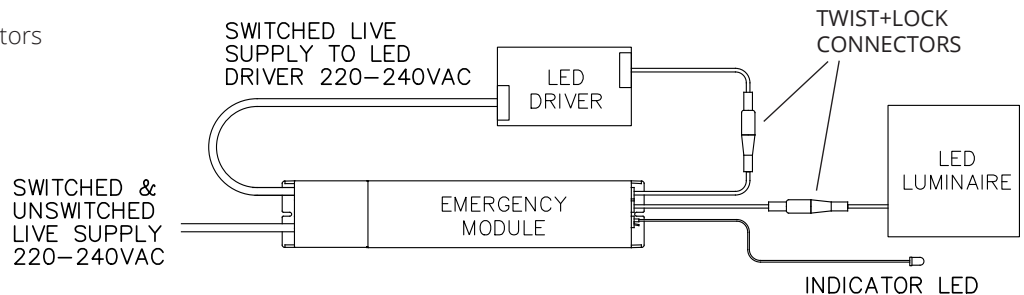

Convert to emergency maintained M3 in 3 easy steps:

All our panels and downlights have twist & lock connectors between the driver and the fitting which mate with the same connectors on the conversion packs

- To convert - unplug the luminaire driver from the panel/downlight and disconnect it from the mains supply
- Reconnect the mains supply to the emergency module
- Connect the emergency module to the luminaire driver and the panel/downlight using the twist & lock connectors.
- Finished!

Two versions - standard and self-test

To test the standard version you should isolate the live supply (typically with a key switch) for a short duration every month, plus for a full 3-hours once a year.

Following recent publicity, we are all more conscious than ever of the need to conduct emergency lighting tests correctly. Our self-test emergency conversion kits are a cost-effective way to assist compliance.

The self-test version commissions itself and then starts a test sequence compliant with BS 5266, comprised of a short test every month and a full 3 hour test every year. After each test the system status is indicated with a tri-colour LED and a bleeper. Battery faults are indicated with a red LED & bleep, luminaire faults with a yellow LED & bleep, all OK is indicated with a green LED and silence.

ORDER CODE	DESCRIPTION
N/REC/M3/PACK/V2	M3 Pack V2 LiFePO ₄ For Recessed Product Ranges
N/REC/STM3/PACK/V2	M3 Pack V2 LiFePO ₄ Self Test For Recessed Product Ranges