


CLEVELAND

Polycarbonate IP65 weather-proof fitting



APPLICATIONS

- Factories, garages and workshops
- Food preparation areas
- Resistant to impact and many chemical agents, but for suitability in specific environments please take specialist advice

CONSTRUCTION


- Polycarbonate base and opal diffuser
- Grade 201 stainless steel diffuser locking and surface mounting clips
- Aluminium heat-sink
- Can also be suspended from wire/chain using clips provided

TECHNICAL DETAILS

- Single and twin rows of SMD LEDs on metal core PCB
- 150 lm/W
- **1,250mm (4ft)**
 - Single 23W, 2,915 lm, 125 l.lm/c.W
 - Twin 38W, 4,845 lm, 126 l.lm/c.W
- **1,550mm (5ft)**
 - Single 36W, 3,935 lm, 109 l.lm/c.W
 - Twin 57W, 6,615 lm, 116 l.lm/c.W
- **1,850mm (6ft)**
 - Single 47W, 5,380 lm, 114 l.lm/c.W
 - Twin 79W, 9,194 lm, 115 l.lm/c.W

TECHNICAL DETAILS (contd.)

- CRI>80
- CCT 4000K
- Branded ENEC approved flicker free driver
- Emergency maintained 3 hr version available for all sizes, as listed

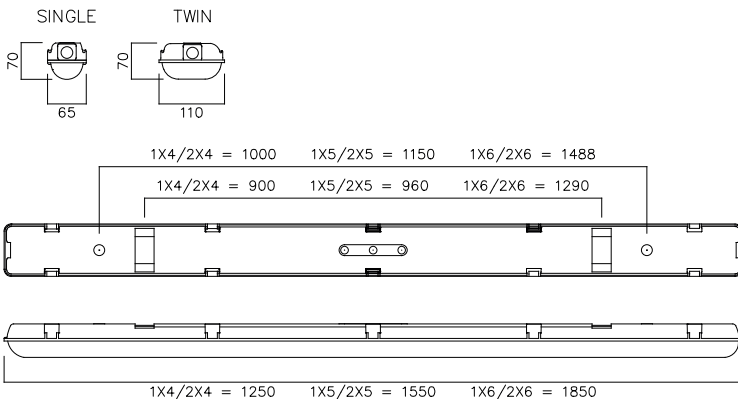

ORDER CODE	DESCRIPTION
NCV1X4/840	Cleveland LED Single 4Ft IP65 Non Corrosive 840
NCV1X4/M3L/840	Cleveland LED Single 4Ft IP65 Non Corrosive M3L 840
NCV1X5/840	Cleveland LED Single 5Ft IP65 Non Corrosive 840
NCV1X5/M3L/840	Cleveland LED Single 5Ft IP65 Non Corrosive M3L 840
NCV1X6/840	Cleveland LED Single 6Ft IP65 Non Corrosive 840
NCV1X6/M3L/840	Cleveland LED Single 6Ft IP65 Non Corrosive M3L 840
NCV2X4/840	Cleveland LED Twin 4Ft IP65 Non Corrosive 840
NCV2X4/M3L/840	Cleveland LED Twin 4Ft IP65 Non Corrosive M3L 840
NCV2X5/840	Cleveland LED Twin 5Ft IP65 Non Corrosive 840
NCV2X5/M3L/840	Cleveland LED Twin 5Ft IP65 Non Corrosive M3L 840
NCV2X6/840	Cleveland LED Twin 6Ft IP65 Non Corrosive 840
NCV2X6/M3L/840	Cleveland LED Twin 6Ft IP65 Non Corrosive M3L 840