



## AGAMLED



### Features

Ultra slim modern polycarbonate wall/ceiling light.

Matt white finish to body and diffuser.

Rear fixing bracket and terminal housing for ease of installation.

Outperforms 38W CFL with opal diffuser by 25% and prismatic diffuser by 52%.

IP54 rating and suitable for bathroom use.

LED lifespan L70 54,000 hours

Non-dimmable.

## General Information

Lamp Type	LED
Colour / Finish	Matt White
IP Rating	IP54
IK Rating	IK09
Class Protection	2
Bathroom Zone	2
Internal / External	Internal / External
Surface / Recessed / Suspended	Surface
Warranty (Years)	3
CE Mark	Yes
Diameter (mm)	296
Depth (mm)	53
Accessories	AGAMLEDBZ/CH

## Technical Information


Wattage	18W
Lumens Delivered	1675lm
Lm/W	93lm
CRI	Ra 80
CCT	4000K
Input	230V
Hertz	50Hz
Operating Temp	-5°C to 35°C

## Technical Data - ETIM - Ceiling-/wall luminaire (EC002892)

Suitable for wall mounting	Yes
Suitable for suspended mounting	No
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	No
Suitable for surface mounting	Yes
With light source	Yes
Suitable for number of lamps	1
Material housing	Plastic
Colour housing	White
Nominal voltage	230-230 V
Control gear included	Yes
No dim function	Yes
Degree of protection (IP)	IP54
Impact strength	IK09
Protection class	II
Suitable for emergency lighting	No
With movement sensor	No
With light sensor	No
Max. system power	18 W
Rated luminous flux acc. IEC 62722-2-1	1675 lm
Colour of light	White
Colour temperature	4000-4000 K
Colour rendering index CRI	80-89
Luminaire efficacy	93 lm/W
Height/depth	53 mm

Length

296 mm

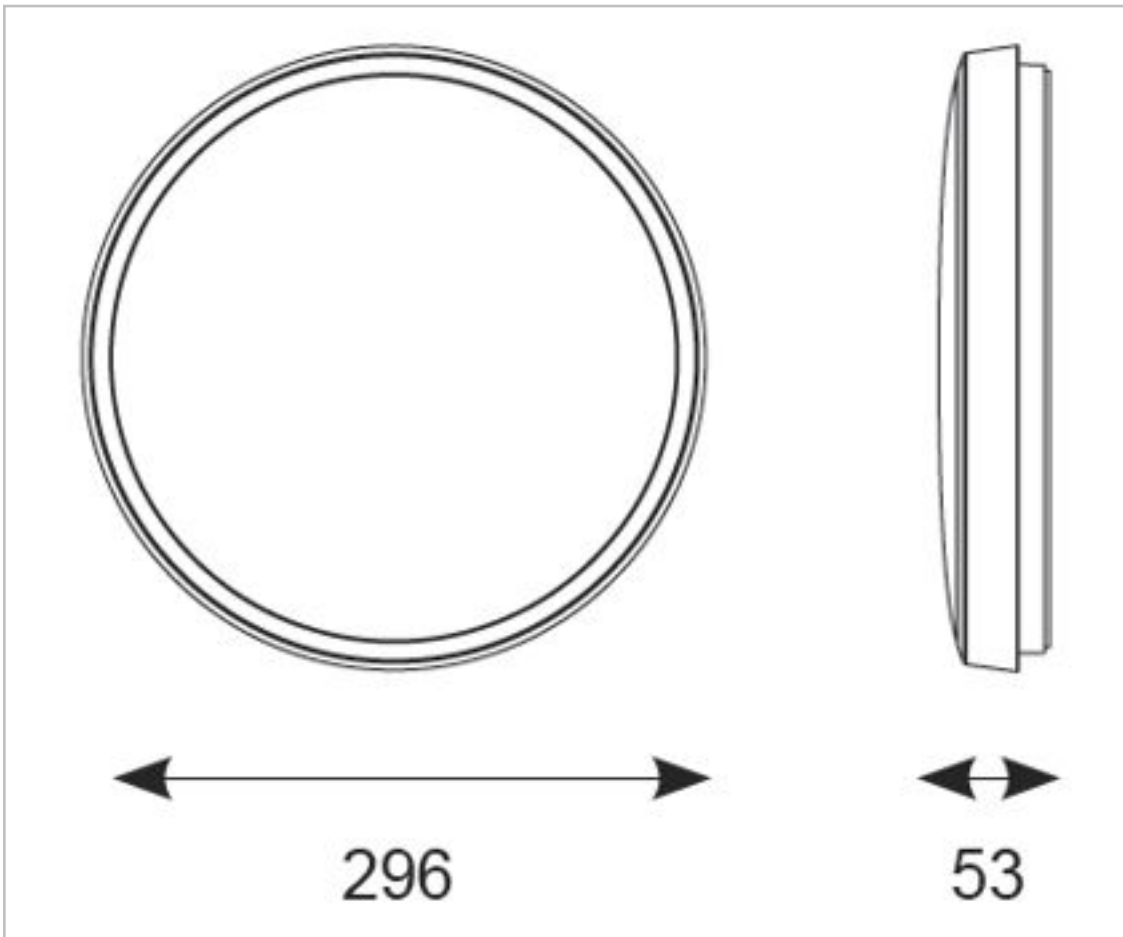

Datasheet generated from <https://onetimepim.com> last updated Monday, September 6, 2021 1:40:03 PM