

# OREGON

A high-performance low-bay with a wide range of dimming, sensor and emergency variants



AVAILABLE WITH OPTIONAL PIR SENSOR



AVAILABLE WITH OPTIONAL WIRE GUARD TO ACHIEVE IK10 RATING

### APPLICATIONS

- Warehouses and factories
- Mounting heights 5M+

### CONSTRUCTION

- Mild steel body
- Painted texture matt RAL 9016
- Aluminium extruded heatsinks
- 2 lenses available: 90° lens (Suffix 90) and High-rack lens (Suffix HR)
- Suitable for easy installation on chain, lighting trunking/rods & BESA fixings
- Piano key style terminal block for easy wiring and loop-in/loop-out
- Easy wiring using terminal access flap

### TECHNICAL DETAILS

- 180 lm/W
- 90° Lens**
  - 12K - 11.5K act. lumens, 82.5W, 140 l.lm/c.W
  - 18K - 18.6K act. lumens, 144W, 129 l.lm/c.W
  - 24K - 22.4K act. lumens, 164W, 137 l.lm/c.W
  - 32K - 30.7K act. lumens, 234W, 131 l.lm/c.W
- High Rack (HR) Lens**
  - 12K - 11.3K act. lumens, 82W, 136 l.lm/c.W
  - 18K - 17K act. lumens, 144W, 118 l.lm/c.W
  - 24K - 23K act. lumens, 162W, 142 l.lm/c.W
  - 32K - 30.4K act. lumens, 234W, 130 l.lm/c.W
- High quality Vossloh Schwabe (VS) LED modules, drivers & lenses
- CRI>80
- CCT 4000K

### OPTIONS

#### EMERGENCY

- Maintained 3 hr versions (add suffix M3)
- Self-test Test Emergency (Suffix STM3) or DALI Addressable Emergency (Suffix DAM3)
- High-output emergency (Suffix M3LH or STM3LH)

#### DIMMING

DALI available. Add suffix DA if required

#### SENSORS


Available with PIR occupancy sensing only, add suffix PIR. For a sensor with dimming, add suffix PIRD

#### PANEL MOUNT CONNECTOR

Available with panel mount male connector fitted. Add suffix M02 (4-pole) or M05 (6-pole)

#### WIRE GUARD

Wire guard accessory is available that screw fixes to luminaire and raises the IK rating to IK10. Order as a separate item as listed

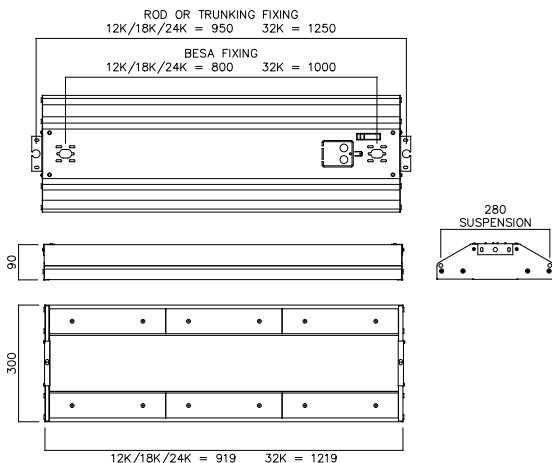

ORDER CODE	DESCRIPTION
NOR/V2/12K/90/840	Oregon V2 12000 Lumen LED Low-Bay 90Deg 840
NOR/V2/18K/90/840	Oregon V2 18000 Lumen LED Low-Bay 90Deg 840
NOR/V2/24K/90/840	Oregon V2 24000 Lumen LED Low-Bay 90Deg 840
NOR/V2/32K/90/840	Oregon V2 32000 Lumen LED Low-Bay 90Deg 840
NOR/V2/12K/HR/840	Oregon V2 12000 Lumen LED Low-Bay HR 840
NOR/V2/18K/HR/840	Oregon V2 18000 Lumen LED Low-Bay HR 840
NOR/V2/24K/HR/840	Oregon V2 24000 Lumen LED Low-Bay HR 840
NOR/V2/32K/HR/840	Oregon V2 32000 Lumen LED Low-Bay HR 840
ACCESSORIES	
NOR/V2/WG	Oregon V2 Wire Guard
NOR/V2/WG/32K	Oregon V2 Wire Guard for 32K