

General Information

Dimensions (mm)	1500 (L) x 96 (W) x 83 (D)
Materials	Base: Polycarbonate Frosted Diffuser: Polycarbonate Diffuser Fixing Clips: 304 Grade Stainless Steel
Base Finish	Light Grey
Product Weight (Kg)	2
Ingress Protection	IP65
Impact Rating (IK)	08
Mounting	Ceiling, Wall or Suspended
Fixing Components Supplied	Surface and Suspension Brackets
Warranty (Years)	5

Supply & Power Information


Continuous Operating Voltage (AC) (Hz)	220-240 (50)
Safety Class	I
Circuit Wattage (W)	55
LED Wattage (W)	55
Input Current (mA)	275
Inrush Current/Time	8A (432ms)
Power Factor	>0.9
Operating Temperature (°C)	-20 to +40
Critical Temperature (°C)	+90
Input Terminations	4 Pole Push Fit Terminals
Cable Input Accessories	20mm IP68 Nylon Gland Supplied

Luminaire Output

Colour Temperature (K)	4000
Colour Render Index (CRI)	>80
Typical Luminous Flux (lm)	6600
Efficacy (lm/W)	120
Beam Angle (°)	105
LED Lifetime (L70) (Hours)	50000

Dimming Information

Dimmable	No
----------	----

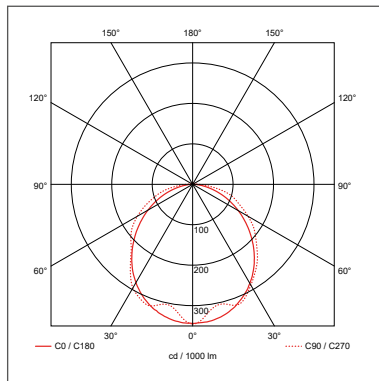

Catalogue



Section



DoC



Installation

