

DENALI

Aluminium bulkhead for commercial outdoor areas



DENALI WITH THE STANDARD CIRCULAR BEZEL

DENALI WITH THE EYELID BEZEL



APPLICATIONS

- Exterior walkways and stairs
- Building perimeters

CONSTRUCTION


- Die-cast aluminium base and bezel, with light-textured UV stable dark grey paint finish to RAL7010
- Polycarbonate opal diffuser
- Piano-key terminal block with capacity for 2 x 1.5mm² cable for loop-in/loop-out
- Twin cable entry points with grommets

TECHNICAL DETAILS


- 140 lm/W
- LEDs on metal core PCB
- **Circular bezel**
15W nom., 18.3W act., 1,759 lm, 96 l.lm/c.W
- **Eyelid bezel**
15W nom., 17W act., 1,295 lm, 76 l.lm/c.W
- CRI>80
- CCT 4000K
- Branded ENEC approved, flicker free, LED driver
- Emergency maintained 3 hr versions available, as listed (suffix M3L)

OPTIONS

- DIMMING** Dim-to-10% (corridor function) available on all variants. Add suffix CF
- SENSOR** Available with microwave occupancy sensor fitted on all versions (except Eyelid M3L) Add suffix MW
- SPECIALIST EMERGENCY** Self-test emergency (STM3) and DALI addressable emergency (DAM3) options available
- SMART WIRELESS** lighting control and addressable test options are available. See pages 100-103 or contact our technical team for details

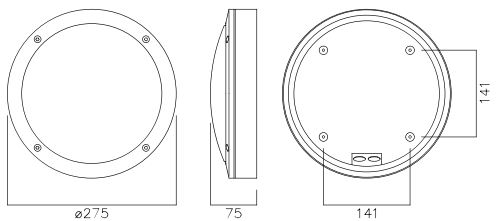

PLAIN TRIM

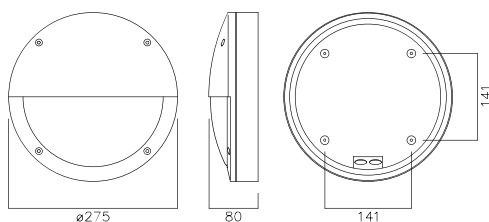

EYELID TRIM

ORDER CODE	DESCRIPTION
NDE15/840	Denali 15W LED IP65 Ali Bulkhead 840
NDE15/M3L/840	Denali 15W LED IP65 Ali Bulkhead M3 Lithium 840
NDE15/ELID/840	Denali 15W LED IP65 Eyelid Ali Bulkhead 840
NDE15/ELID/M3L/840	Denali 15W LED IP65 Eyelid Ali Bulkhead M3 Lithium 840