# ATC **Sienna** Outdoor Quartz Infra-Red Electric Heaters



ATC Sienna 2200W Infrared Heater Black



ATC Sienna 2200W Infrared Heater Silver



ATC Sienna 4000W Infrared Heater Black



ATC Sienna 4000W Infrared Heater Silver







## **Description**

Model	Sienna 2200	Sienna 4000
Product Code	SIE2.2KW-BL   SIE 2.2KW-SL	SIE4KW-BL  SIE4KW-SL
Colour	Black   Silver	Black   Silver

# **Attractive Design with High Performance**

The Sienna high-performance range of Outdoor Quartz Infra-Red electric heaters are suitable for many applications, industries and environments.

Fitted with Low Glare lamps the heaters provide a comfortable level of heat without the sharp glare of standard infra-red lamps. The Sienna Heaters are for mounting on the wall or structure from 2.7m to 3.5m. Attractive design with a high performance these range of heaters will enhance the outdoor heating experience.

Available in two sizes, 2200W and 4000W, rated IPX5 Weatherproof, the Sienna range is available in Black or Silver finishes.

#### **Product Features**

- Attractive Design
- Low Glare Flement
- Parabolic Reflector for Even Spread of Heat
- Creates Comfortable Environment
- 2 Sizes; 2200W & 4000W
- 2 Colours: Sliver and Black
- Multiple Mounting Heights
- Energy Efficient
- Costs £0.17p per KwH to run
- Instant Heat
- Wall Mounting
- Suitable for Commercial Industrial Applications
- Maintenance Free
- Easy to Install
- IPX5 Weatherproof



**Restaurants** 



**Pubs** 

**Factories** 

**Hotels** 



Warehouses



Stadia

# **ATC Sienna Outdoor Quartz Infra-Red Electric Heaters**

### **Technical Details**

# Description

Model	Sienna 2200	Sienna 4000		
Product Code	SIE2.2KW-BL   SIE 2.2KW-SL	SIE4KW-BL  SIE4KW-SL		
Colour	Black   Silver	Black   Silver		
Electrical Specifications				
Power output (Watts)	2200	4000		
Voltage	220-240	220-240		
Frequency (Hertz)	50-60	50-60		
Current (Amps)	10	18		
Lamps	1	2		
Lamp Arrangement	Single	Stacked Vertically		
Lamp type	Low Glare	Low Glare		
Emmission	IR-A	IR-A		

### **Mounting and Installation**

Installation	Wall / Ceiling (@45° Only)	Wall / Ceiling (@45° Only)
Mounting height	2.7 - 3m	3-3.5m
Heating Area (M²)* @45°	10 - 15	20 - 32
Minimum cable size	3 x 1.5 <sup>2</sup>	2x (3 x 1.5²)
Supplied with or without cable	With (5m)	With (2 x 1.5m)
Lamps switchable or all together	N/A	Separate supplies for each lamp
Dimmable (With controller)	Yes	Yes

### **Dimensions & Weight**


Dimensions (HxWx D) mm 195x465x11	0 100/10/11/10
Weight (Kg - Nett) 2.45	4.05
IP Rating IPX5	IPX5

#### **Approvals**

Certifications	CE, IMQ-GS,	CE, IMQ-GS,

# Heating Area m<sup>2</sup>

Wall Mounted 45°

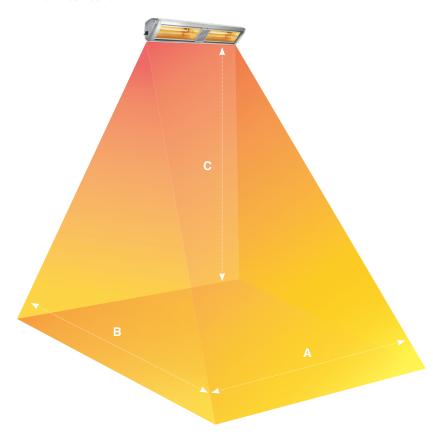

Model	Wall Mounted 45°			
	Α		С	
SIE2.2KW	5	3	3	
SIE4KW	8	4	4	

It is recommended to install Outdoor radiant heaters protected from strong breezes or crosswinds. Based on average ambient temperature of 10°C.